

RAW POWER VRLA AGM Battery 12V 3.3AH [12RP3.3VA]



General Features

- Designed floating charging service life: 8 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~40°C
- Lead Aluminum calcium Tin alloy high energy, prevent corrosion


Application

- DC power supply
- UPS/EPS power supply
- Electrical devices & instruments
- Security and fire alarm systems
- Telecom stations and power stations
- Medical equipments
- Emergency lighting systems

Physical Specifications

Nominal Voltage	Nominal Capacity (20HR)	Dimension				Weight $\pm 3\%$	Internal Resistance (In full charge status)	Standard Terminals
		L	W	H	TH			
12V	3.3AH	134 $\pm$ 2mm	67 $\pm$ 2mm	61 $\pm$ 2mm	67 $\pm$ 2mm	Approx1.23kg (2.71lbs)	$\approx$ 59m Ω	F01 (standard)

Dimensions

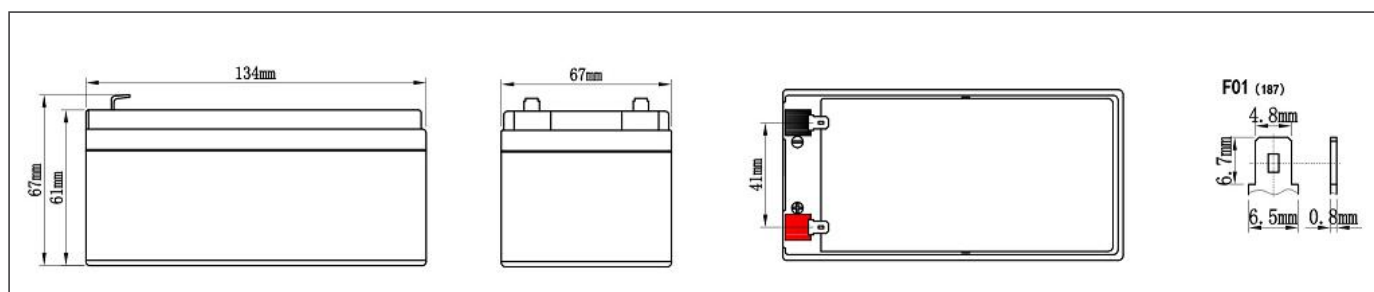

Constant-Voltage Charge

Rated Capacity		Cycle Application	
20 hour rate (0.165A)	3.30AH	1. Limit initial current less than 0.99A.	
10 hour rate (0.33A)	3.07AH	2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).	
5 hour rate (0.561A)	2.65AH	3. Hold at 14.1V to 14.4V until current drop to under 0.0198A for at least 3 hours.	
27 minute rate (3.3A)	1.49AH	4. Temperature compensation coefficient of charging voltage is -30mV/°C.	
7 minute rate (9.9A)	1.16AH		
Capacity affected by Temperature		Standby Service	
40°C(104°F)	103%	1. Hold battery across constant voltage source of 13.6to 13.8 volts with current limit 0.99A continuously .When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status.	
25°C(77°F)	100%	2. Temperature compensation coefficient of charging voltage is -18mV/°C.	
0°C(32°F)	86%		

NOTE : The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation

Battery Discharge Table

End Voltage (V)	Minute (M)					Hour (H)							
	5	10	15	30	45	1	1.5	2	3	5	8	10	20
Constant Current Discharge Data Sheet (Amperes at 25°C)													
10.20	12.19	8.14	6.48	3.33	2.50	1.98	1.58	1.17	0.885	0.566	0.377	0.313	0.168
10.50	11.69	7.99	6.34	3.22	2.44	1.97	1.55	1.13	0.858	0.556	0.374	0.310	0.167
10.80	11.06	7.79	6.17	3.11	2.34	1.95	1.52	1.08	0.827	0.546	0.37	0.307	0.165
Constant Power Discharge Data Sheet (Watt at 25°C)													
10.20	133.0	95.89	77.63	43.84	31.96	24.32	18.65	14.03	10.01	6.60	4.65	3.76	2.03
10.50	127.5	92.72	75.32	42.94	31.23	23.93	18.38	13.83	9.79	6.52	4.61	3.71	2.00
10.80	120.8	89.27	72.88	41.69	30.44	23.53	18.1	13.63	9.62	6.45	4.56	3.64	1.97

Performance Characteristics

