

# RAW POWER VRLA AGM Battery

6V4.5AH[6RP4.5VA]



## General Features

- Designed floating charging service life: 8 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~40°C
- Lead Aluminum calcium Tin alloy high energy, prevent corrosion


## Application

- DC power supply
- UPS/EPS power supply
- Electrical devices & instruments
- Security and fire alarm systems
- Telecom stations and power stations
- Medical equipments
- Emergency lighting systems

## Physical Specifications

| Nominal Voltage | Nominal Capacity (20HR) | Dimension |        |         |         | Weight ±3%                 | Internal Resistance (In full charge status) | Standard Terminals |
|-----------------|-------------------------|-----------|--------|---------|---------|----------------------------|---------------------------------------------|--------------------|
|                 |                         | L         | W      | H       | TH      |                            |                                             |                    |
| 6V              | 4.5AH                   | 70±2mm    | 47±1mm | 100±2mm | 105±2mm | Approx 0.70kg<br>1.54 lbs) | ≈17.0 mΩ                                    | F01/F02 (standard) |

## Dimensions

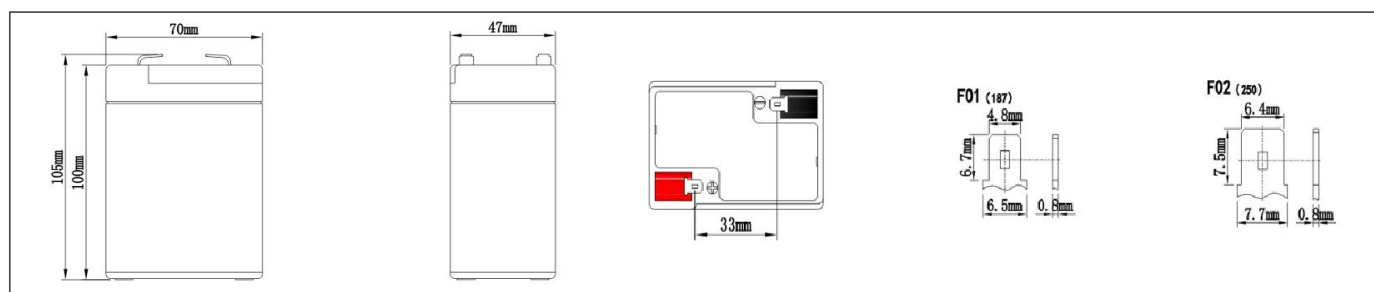

## Constant-Voltage Charge

| Rated Capacity                   |        | Cycle Application                                                                                                                                                                                                                |  |
|----------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 20 hour rate (0.225A)            | 4.50AH | 1. Limit initial current less than 1.125A.                                                                                                                                                                                       |  |
| 10 hour rate (0.45A)             | 4.18AH | 2. Charge until battery voltage (under charge) reaches 7.05V to 7.20V at 25°C(77°F).                                                                                                                                             |  |
| 5 hour rate (0.76A)              | 3.60AH | 3. Hold at 7.05V to 7.20V until current drop to under 0.027A for at least 3 hours.                                                                                                                                               |  |
| 27 minute rate (4.5A)            | 2.03AH | 4. Temperature compensation coefficient of charging voltage is -15mV/°C.                                                                                                                                                         |  |
| 7 minute rate (13.5A)            | 1.58AH | Standby Service                                                                                                                                                                                                                  |  |
| Capacity affected by Temperature |        | 1. Hold battery across constant voltage source of 6.8 to 6.9 volts with current limit 1.125A continuously .When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status. |  |
| 40°C(104°F)                      | 103%   | 2. Temperature compensation coefficient of charging voltage is -9mV/°C.                                                                                                                                                          |  |
| 25°C(77°F)                       | 100%   |                                                                                                                                                                                                                                  |  |
| 0°C(32°F)                        | 86%    |                                                                                                                                                                                                                                  |  |


⚠ NOTE : The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation

## Battery Discharge Table


| End Voltage (V)                                                | Minute (M) |       |       |       |       | Hour (H) |       |      |      |       |       |       |       |
|----------------------------------------------------------------|------------|-------|-------|-------|-------|----------|-------|------|------|-------|-------|-------|-------|
|                                                                | 5          | 10    | 15    | 30    | 45    | 1        | 1.5   | 2    | 3    | 5     | 8     | 10    | 20    |
| <b>Constant Current Discharge Data Sheet (Amperes at 25°C)</b> |            |       |       |       |       |          |       |      |      |       |       |       |       |
| 5.10                                                           | 16.63      | 11.10 | 8.84  | 4.54  | 3.41  | 2.57     | 2.09  | 1.60 | 1.20 | 0.754 | 0.505 | 0.437 | 0.230 |
| 5.25                                                           | 15.94      | 10.89 | 8.65  | 4.40  | 3.33  | 2.55     | 2.05  | 1.54 | 1.16 | 0.742 | 0.500 | 0.433 | 0.228 |
| 5.40                                                           | 15.08      | 10.63 | 8.41  | 4.24  | 3.19  | 2.53     | 2.00  | 1.47 | 1.12 | 0.730 | 0.495 | 0.428 | 0.225 |
| <b>Constant Power Discharge Data Sheet (Watt at 25°C)</b>      |            |       |       |       |       |          |       |      |      |       |       |       |       |
| 5.10                                                           | 90.7       | 65.40 | 52.95 | 29.90 | 21.80 | 16.58    | 12.72 | 9.57 | 6.83 | 4.50  | 3.17  | 2.57  | 1.38  |
| 5.25                                                           | 86.9       | 63.20 | 51.35 | 29.28 | 21.29 | 16.32    | 12.53 | 9.43 | 6.68 | 4.45  | 3.15  | 2.53  | 1.36  |
| 5.40                                                           | 82.4       | 60.85 | 49.70 | 28.43 | 20.75 | 16.05    | 12.35 | 9.30 | 6.56 | 4.40  | 3.11  | 2.49  | 1.34  |

## Performance Characteristics


**Charge Characteristics (25°C/77°F)**

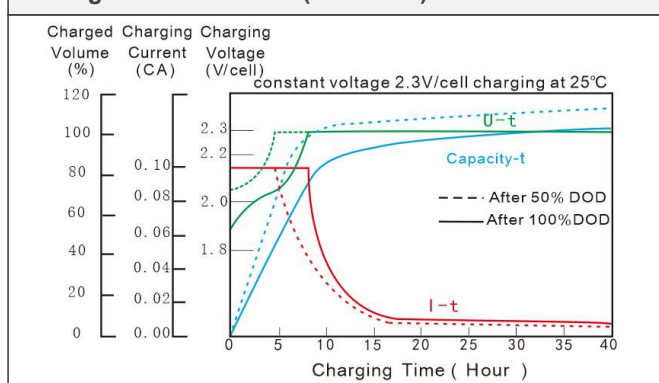


**Discharge Characteristic (25°C/77°F)**

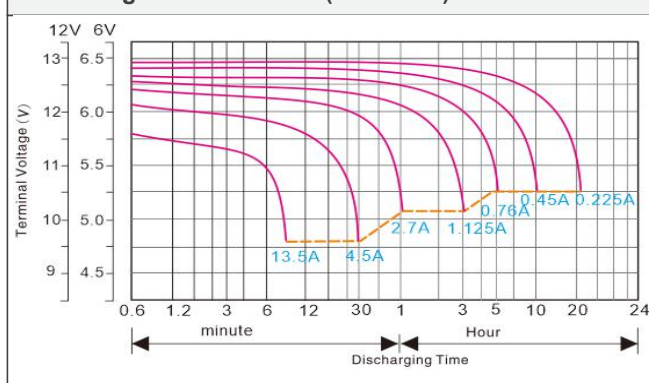


**Cycle Life in Relation to Depth of Discharge**

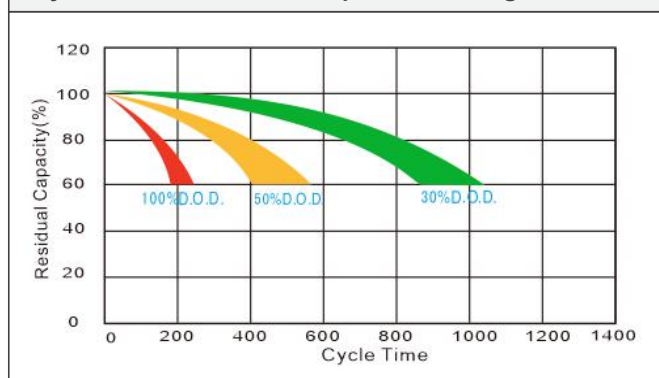

**Temperature vs Float Life**

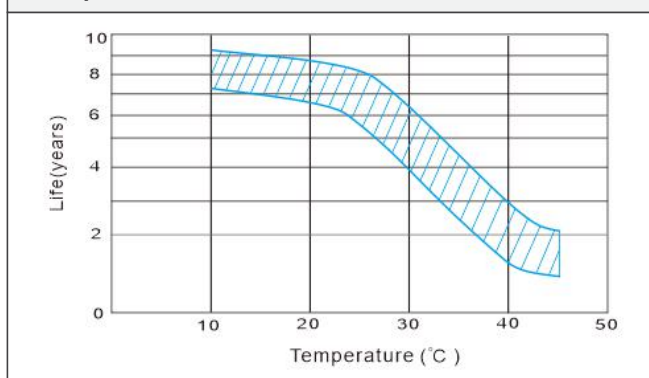

**Capacity Curve At Different Temperature**

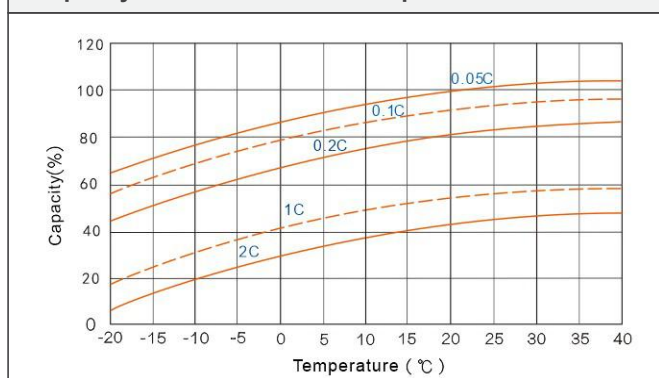

**Self Discharge Characteristics**

